



CONDENSATE PUMPS

HVAC PUMPS

FEATURES

- Thermally protected, fan cooled motor
 - ½ Gallon collection tank
 - Stainless steel motor shaft
 - Automatic operation
 - 3/8" barbed discharge with built in check valve
 - Four 1-1/8" inlet openings with removable caps
 - Dual function NO (Normally Open) and NC (Normally Closed) safety switch with 8" lead wires*
 - Stainless steel wall mount tabs included
 - 6' power cord with grounded 3-prong plug
 - Maximum water temperature 140° F
 - Select models include 3/8" x 20' vinyl discharge tubing and stainless clamp*
- * On select models only

1/50HP - 1/30HP - 230V Without Safety Switch



1/50HP - 1/30HP - 230V With Safety Switch



Optional Hose Kit



1 YEAR WARRANTY



Application

For automatic removal of condensate from air conditioning coils, dehumidifiers, ice makers and refrigeration equipment when a drain is not accessible or practical. Pumps can also be used for high efficiency oil and gas-fired condensing furnace and boiler equipment.

Condensate Pump WITHOUT Hose and Clamp

Model	HP	Voltage	Amps	Hz	Watts	Discharge Size	Safety Switch Included	Max flow GPH	Max Head Ft.	3/8" x 20' Vinyl Tubing	Weight (lbs)
97150	1/50	115	1.2	60	65	3/8" OD Barbed	No	88	18'	No	4.1
97152	1/50	115	1.2	60	65	3/8" OD Barbed	Yes	88	18'	No	4.2
97200	1/30	115	1.5	60	80	3/8" OD Barbed	No	108	21'	No	4.5
97202	1/30	115	1.5	60	80	3/8" OD Barbed	Yes	108	21'	No	4.6
97233	1/30	230	0.6	50/60	65	3/8" OD Barbed	No	100	21'	No	5.1
97230	1/30	230	0.6	50/60	65	3/8" OD Barbed	Yes	100	21'	No	5.2

Condensate Pump WITH Hose and Clamp


Model	HP	Voltage	Amps	Hz	Watts	Discharge Size	Safety Switch Included	Max flow GPH	Max Head Ft.	3/8" x 20' Vinyl Tubing	Weight (lbs)
97151	1/50	115	1.2	60	65	3/8" OD Barbed	No	88	18'	Yes	5.1
97154	1/50	115	1.2	60	65	3/8" OD Barbed	Yes	88	18'	Yes	5.2
97201	1/30	115	1.5	60	80	3/8" OD Barbed	No	108	21'	Yes	5.5
97204	1/30	115	1.5	60	80	3/8" OD Barbed	Yes	108	21'	Yes	5.6
97231	1/30	230	0.6	50/60	65	3/8" OD Barbed	No	100	21'	Yes	6.1
97234	1/30	230	0.6	50/60	65	3/8" OD Barbed	Yes	100	21'	Yes	6.2

Motor & Pump Specifications

Phase	Single
Motor Type	C-Frame / Shaded Pole
Insulation	Class A
Circuit Requirements	15 amp (min) individual circuit
Duty Rating	Continuous
Motor Shaft	Stainless Steel
Motor Bearings	Sleeve
Cooling	Fan cooled
Motor Protection	Auto reset thermal overload protector
Discharge Size	3/8" Barbed fitting with internal check valve
Power Cord Length	6'
Cord Type	SJTW, UL listed, 3-wire, 18 gauge
Tank	ABS
Motor/Upper Housing	ABS
Impeller Material	Reinforced Thermoplastic
Max Liquid Temp	140° F
Operation	Automatic

Performances

GPH @ listed discharge height	0'	5'	10'	15'	20'
1/50 HP	88	84	66	6	0
1/30 HP	108	102	78	54	15
230 Volt	100	96	72	42	11

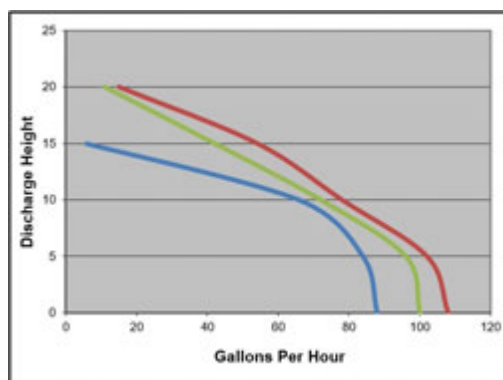

Without safety switch



With safety switch

