


# 92272: PERFORMANCE

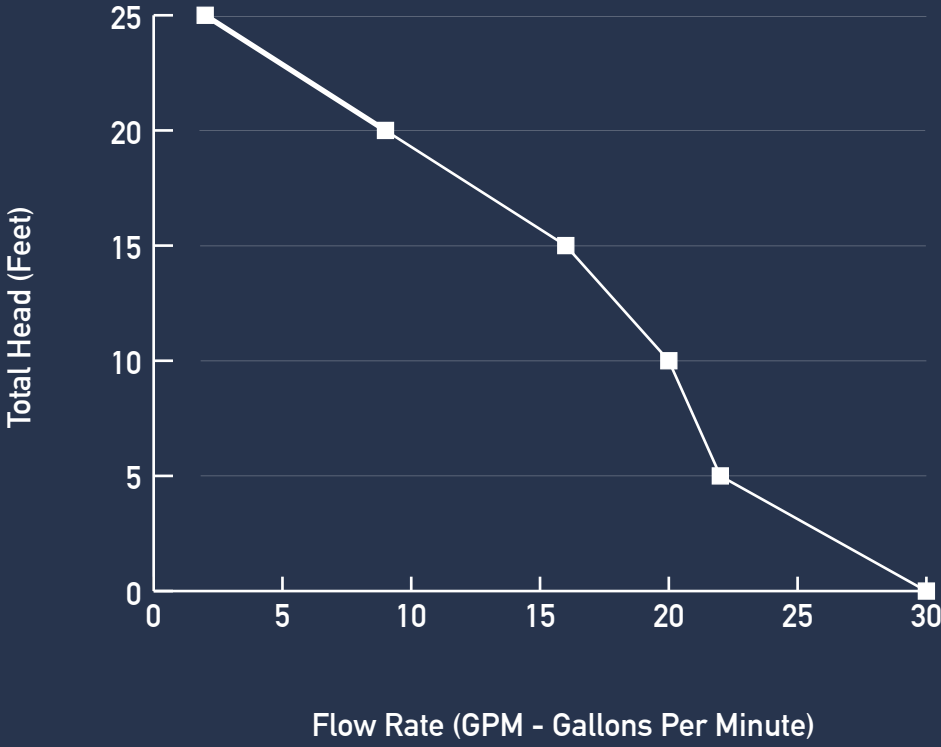

| HEAD               | 0'   | 5'   | 10'  | 15' | 20' | 25' |
|--------------------|------|------|------|-----|-----|-----|
| Gallons Per Minute | 30   | 22   | 20   | 16  | 9   | 2   |
| Gallons Per Hour   | 1800 | 1320 | 1200 | 960 | 540 | 120 |

# 92272: TECHNICAL SPECIFICATIONS

|                    |                                      |
|--------------------|--------------------------------------|
| HORSEPOWER         | 1/4                                  |
| AMPS               | 3.8                                  |
| CONSTRUCTION       | Thermoplastic                        |
| SWITCH TYPE        | Vertical                             |
| DISCHARGE SIZE     | 1-1/2"                               |
| DISCHARGE TYPE     | Side                                 |
| CORD LENGTH        | 10'                                  |
| SOLIDS HANDLING    | 3/8"                                 |
| IMPELLER TYPE      | Thermoplastic                        |
| SWITCH ON POINT    | 6.5"                                 |
| SWITCH OFF POINT   | 2"                                   |
| LIQUID TEMP. RANGE | 35° F - 120° F                       |
| PUMPS DOWN TO      | 1" From Surface When Used As Utility |
| WARRANTY           | 1 Year                               |

# 92272: OPTIONAL ACCESSORIES

|                |              |          |
|----------------|--------------|----------|
| BATTERY BACKUP | CHECK VALVES | ALARMS   |
| BASINS         | BASIN COVERS | HOSE KIT |
| ADAPTERS       | BASE         | FILTERS  |