


92875: PERFORMANCE

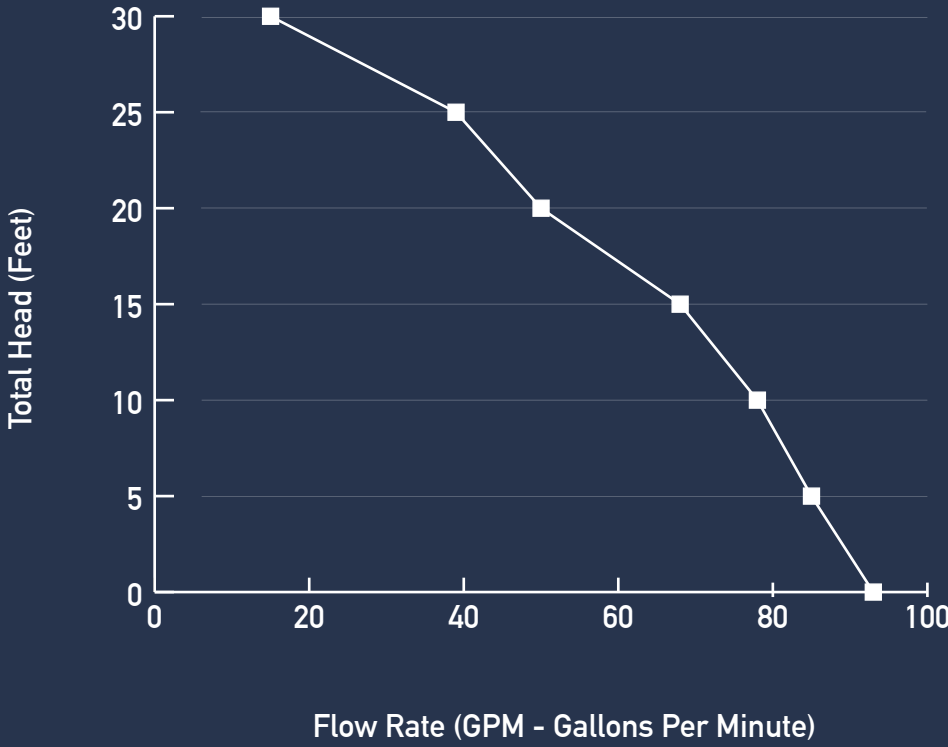

HEAD	0'	5'	10'	15'	20'	25'	30'
Gallons Per Minute	93	85	78	68	50	39	15
Gallons Per Hour	5580	5100	4680	4080	3000	2340	900

92875: TECHNICAL SPECIFICATIONS

HORSEPOWER	1/2
AMPS	11.4
CONSTRUCTION	Stainless Steel
FLOAT SWITCH	Tethered Float Switch
DISCHARGE SIZE	1-1/4"
DISCHARGE TYPE	Top
CORD LENGTH	25'
SOLIDS HANDLING	1/2"
IMPELLER TYPE	Stainless Steel
LIQUID TEMP. RANGE	35° F - 120° F
MINIMUM DRAIN DIAMETER	8"
WARRANTY	1 Year

92875: OPTIONAL ACCESSORIES

FLOAT SWITCHES	CHECK VALVES	ALARMS
LAKE SCREEN FILTERS	ADAPTERS	HOSE KITS