


92395: PERFORMANCE

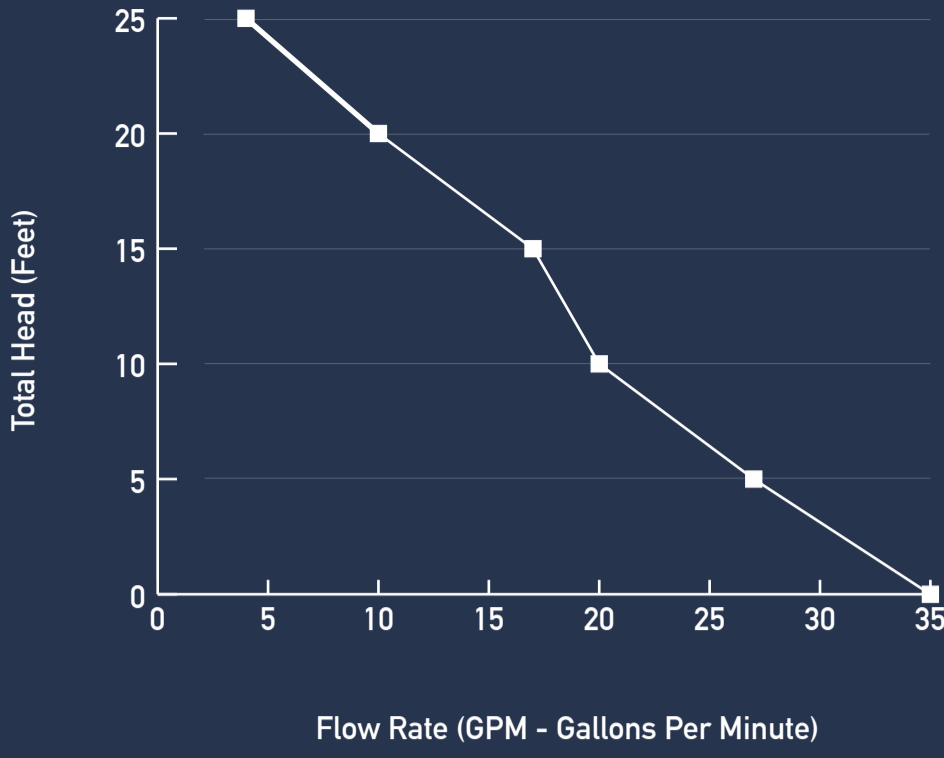

| HEAD | 0' | 5' | 10' | 15' | 20' | 25' |
|--------------------|------|------|------|------|-----|-----|
| Gallons Per Minute | 35 | 27 | 20 | 17 | 10 | 4 |
| Gallons Per Hour | 2100 | 1620 | 1200 | 1020 | 600 | 240 |

92395: TECHNICAL SPECIFICATIONS

| | |
|--|--|
| MOTOR SPECIFICATIONS | |
| HORSEPOWER | 1/3 |
| VOLTAGE | 120 |
| AMPS | 3.8 |
| HERTZ | 60 |
| PHASE | Single |
| RPM | 3450 |
| MOTOR TYPE | Permanent Split Capacitor (PSC) |
| INSULATION | Class A |
| CIRCUIT REQUIREMENTS | 15 amp (mini) Individual Circuit |
| DUTY RATING | Continuous* For continuous operation, the water depth must be at least 1-1/2" to prevent the motor from overheating |
| SHAFT SEAL | Carbon/Ceramic and Stainless Steel |
| MOTOR SHAFT | Stainless Steel |
| UPPER MOTOR BEARING | Ball Bearing |
| LOWER MOTOR BEARING | Ball Bearing |
| COOLING | Oil Cooled |
| MOTOR PROTECTION | Auto Reset Thermal Overload Protection |
| PUMP SPECIFICATIONS | |
| DISCHARGE SIZE | 1" NPT & 3/4" Garden Hose Thread |
| CORD LENGTH | 25' |
| CORD TYPE | SJTW, UL Listed, 3-Wire, 18 Gauge |
| PUMP HOUSING | Thermoplastic |
| PUMP BASE | Thermoplastic |
| IMPELLER MATERIAL | Thermoplastic |
| IMPELLER TYPE | Clog Resistant |
| GASKET | Bruna-N |
| LIQUID TEMP. RANGE | 35° F - 120° F |
| OPERATION | Automatic |
| FASTENERS | Stainless Steel |
| MAX FLOW RATE | 35 Gallons Per Minute |
| MAX HEAD | 25' |
| MAX PRESSURE | 10.8 PSI |
| WEIGHT | 11 LBS |
| WARRANTY | 3 Years |
| AUTOMATIC SWITCH SPECIFICATIONS | |
| TYPE | Internal SJE Rhombus Vertical Master II |
| SWITCH ON POINT | 1-1/2" |
| SWITCH OFF POINT | 3/4" |
| MATERIAL | High impact PVC |